


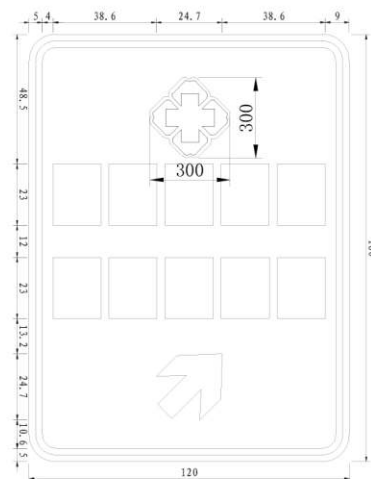
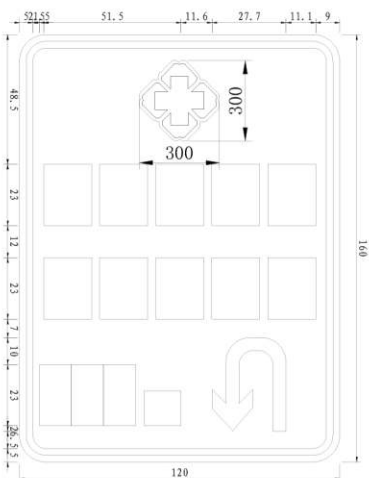


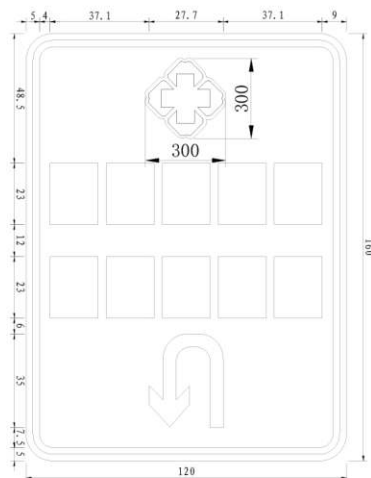


注:

- 1、采用国标IV类反光膜或现场原标志的等级反光膜，但不能低于IV类的标准
- 2、以现场的版面尺寸设计新的版面内容

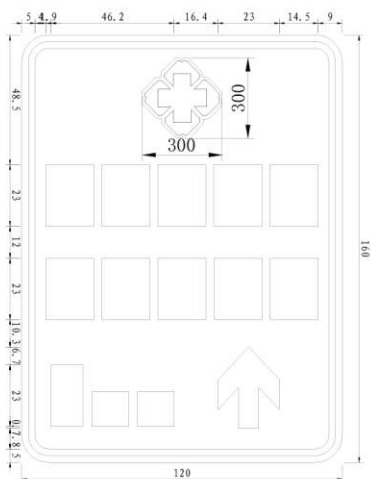

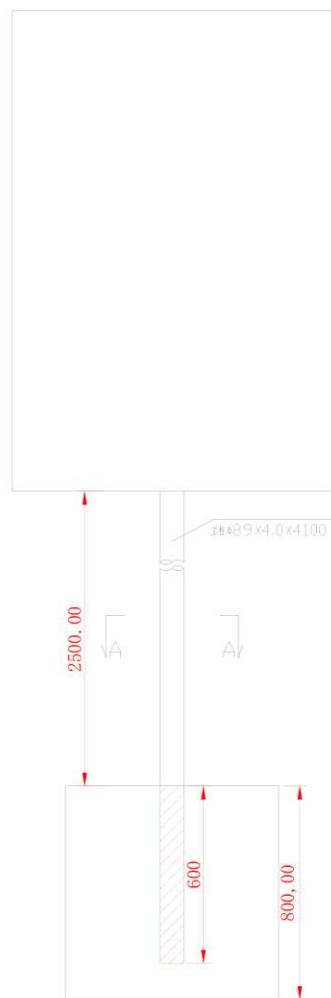

标志立面图 1:20




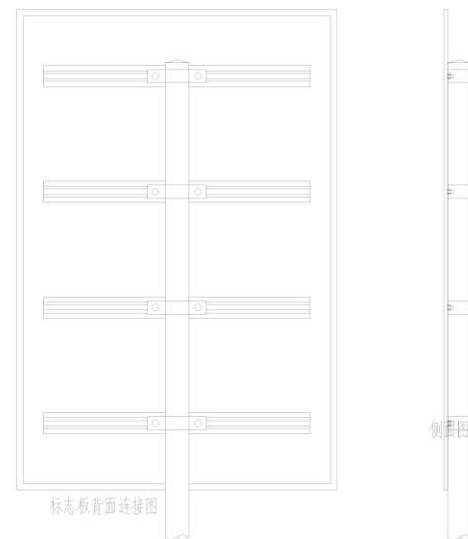


单柱式标志材料数量表(不含基础)

材料名称	规格(mm)	单位(kg)	数量(件)	重量(kg)	备注
标志板	1200x1600x3	17.496	1	17.496	LF2-M板
钢管立柱	φ89x4x4100	34.899	1	34.899	Q235
滑动螺栓	80x18x4x1000	1.296	4	5.184	7A04#
螺母	5x16	0.004	36	0.127	Q235
垫圈	361.7x50x5	0.714	4	2.857	Q235
垫圈衬底	221.4x50x5	0.437	4	1.749	Q235
滑动螺栓	M12x45	0.049	8	0.393	Q235
螺母	M12	0.024	8	0.192	
垫圈	M12x2	0.008	8	0.023	
加劲筋	96x192x8	0.857	4	3.43	Q235
加劲筋法兰	300x300x15	10.665	1	10.665	Q235
立杆帽	φ81x3x80	0.651	1	0.651	Q235
反光膜	标志			2.16m ²	

单柱式标志基础材料数量表

材料名称	规格(mm)	单位(kg)	数量(件)	重量(kg)	备注
定位法兰盘	300x300x20	14.22	1	14.22	Q235
预埋螺栓	M16x849	1.348	4	5.391	Q235
螺母	M16	0.05	8	0.404	
垫圈	M16x2	0.006	8	0.049	
主筋φ16	L=720	1.144	14	16.011	HPB235
箍筋φ16	L=3108	4.937	7	34.557	HPB235
混凝土	600x800x800	0.384m ³	1	0.384m ³	C25

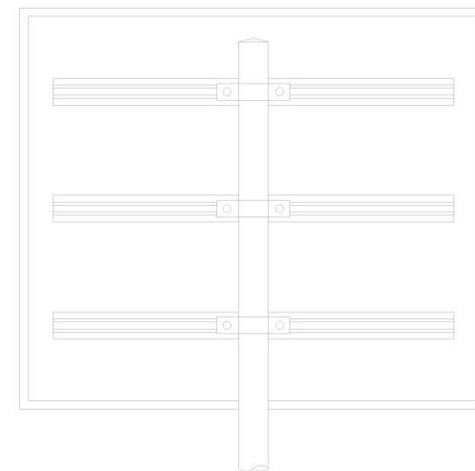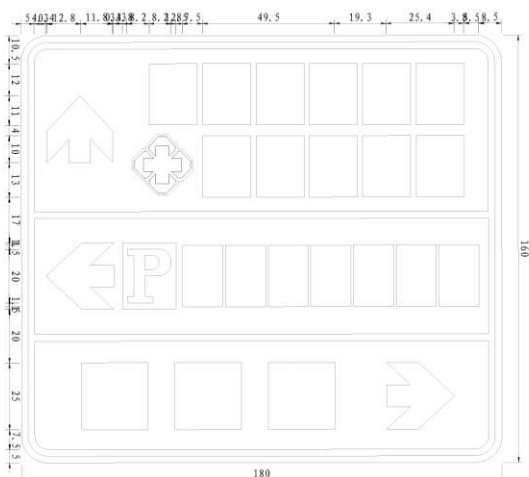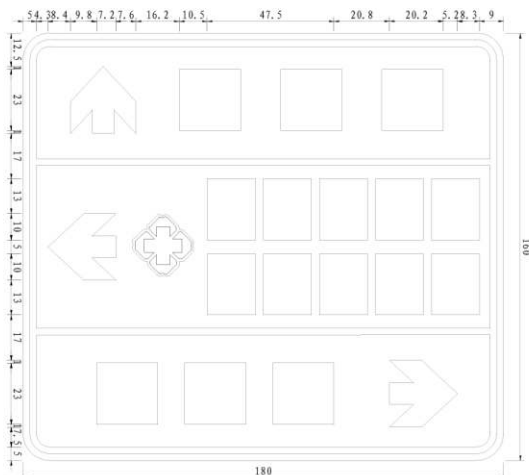


标志板背面连接图 1:20

单柱式标志材料数量表(不含基础)

材料名称	规格(mm)	单件重(kg)	件数(件)	重量(kg)	备注
标志板	1800x1600x3	13.608	1	13.608	LF2-M级
钢管立柱	φ89x4x4700	30.643	1	30.643	Q235
滑动槽钢	80x18x4x1600	1.555	3	4.665	7A04槽
铆钉	5x16	0.004	33	0.117	Q235
垫圈	361.7x50x5	0.714	3	2.143	Q235
镀锌衬套	221.4x50x5	0.437	3	1.312	Q235
滑动螺栓	M12x45	0.049	6	0.294	Q235
螺母	M12	0.024	6	0.144	
垫圈	M12x2	0.003	6	0.017	
加劲肋	96x192x8	0.857	4	3.43	Q235
加劲法兰盘	300x300x15	10.665	1	10.665	Q235
立柱帽	φ81x3x80	0.651	1	0.651	Q235
反光膜	V类			1.68m ²	

单柱式标志基础材料数量表

材料名称	规格(mm)	单件重(kg)	件数(件)	重量(kg)	备注
定位法兰盘	300x300x20	14.22	1	14.22	Q235
底座螺栓	M16x849	1.348	4	5.391	Q235
螺母	M16	0.05	8	0.404	
垫圈	M16x2	0.006	8	0.049	
主筋φ16	L=720	1.144	14	16.011	HPB235
箍筋φ16	L=3108	4.937	7	34.557	HPB235
混凝土	600x800x800	0.384m ³	1	0.384m ³	C25

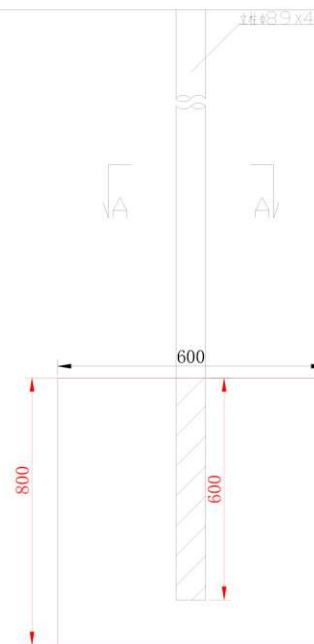

标志立面图 1:20